

ED2-96 SERIES

ED2SYS-96 SERIES

HEATED DISPLAY SYSTEMS



ED2-96



ED2SYS-96



- HALO HEAT ... a controlled, uniform heat source that gently holds and surrounds food for better appearance, taste, and longer holding life.
- Holds and displays hot food fresh and moist for hours — without adding water.
- Expandable system to meet your specific requirements.
- Matches profile of leading refrigerated display case.
- **HOT DISPLAY CASE**
 - Curved glass styling.
 - Displays hot food without condensation on glass.
 - Protected with an environmentally friendly bumper, made of 93% pre-consumer polycarbonate waste and is 100% recyclable.
 - Thermostatically controlled heat source radiates from the base of the display case in multiple heat zones.
 - Overhead light zones with shatterproof coated bulbs.
 - Holds a full range of standard (gastronorm) pan sizes, full-size or half-size sheet pans.
 - Tempered sliding glass doors reflect heat back into the products and mirror the display to enhance merchandising effect.
- **DECORATOR BASE**
 - Standard black painted front and end panels.
- **SELF-SERVICE HOT DISPLAY**
 - Customer self-service opening is available on right side or left side of case.
 - Front mounted heat-guard provides customer protection.

The display case is constructed of 18 gauge, non-magnetic stainless steel. A tempered glass front encloses the display case and can be lifted to a 90 degree angle for easy cleaning. Removable, sliding glass doors on the operator side are included. Sliding door tracks have a "clean sweep" cutout allowing for easy cleaning and crumb removal. Framed end glass with rubber gasket material protects glass edges from chipping and breakage. The base is divided into three (3) individually managed heat zones with each zone controlled by a separate thermostat with a range of 1 through 10 and heat-on indicator light. Overhead lights are controlled by ON/OFF switches in three (3) light zones. Two (2) 125V plug outlets are available as an option on 120/208-240V units only. Counter-top display cases include one set of 4" (102mm) legs.

- | |
|---|
| <input type="checkbox"/> ED2-96 - 96" (2438mm) length |
| <input type="checkbox"/> ED2SYS-96* - 96" (2438mm) length, with base |
| <input type="checkbox"/> ED2-96/PL - 96" (2438mm) length, 23-3/4" (603mm) self-service opening on left side of case front |
| <input type="checkbox"/> ED2SYS-96/PL* - 96" (2438mm) length, with base, 23-3/4" (603mm) self-service opening on left side of case front |
| <input type="checkbox"/> ED2-96/PR - 96" (2438mm) length, 23-3/4" (603mm) self-service opening on right side of case front |
| <input type="checkbox"/> ED2SYS-96/PR* - 96" (2438mm) length, with base, 23-3/4" (603mm) self-service opening on right side of case front |

*The system base is not sold as a separate item. Order the full ED2SYS model to receive the base.



IP X3

FACTORY INSTALLED OPTIONS

- | | | | |
|---|--|--|---|
| <ul style="list-style-type: none"> • Electrical Choices <ul style="list-style-type: none"> <input type="checkbox"/> 120/208-240V <input type="checkbox"/> 230V <input type="checkbox"/> 380-415V | <ul style="list-style-type: none"> • Panel Color Choices <ul style="list-style-type: none"> <input type="checkbox"/> Black, standard <input type="checkbox"/> Stainless Steel, optional <input type="checkbox"/> Custom Color, optional | <ul style="list-style-type: none"> • End Glass Choices <ul style="list-style-type: none"> <input type="checkbox"/> Clear Glass, standard <input type="checkbox"/> Solar Bronze Glass, optional [5011353] | <ul style="list-style-type: none"> <input type="checkbox"/> Temperature Gauge, optional [GU-33384] <input type="checkbox"/> Independent Electrical Outlet, optional [5001781] <input type="checkbox"/> Temperature Probe, optional [5004918] |
|---|--|--|---|




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA


FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



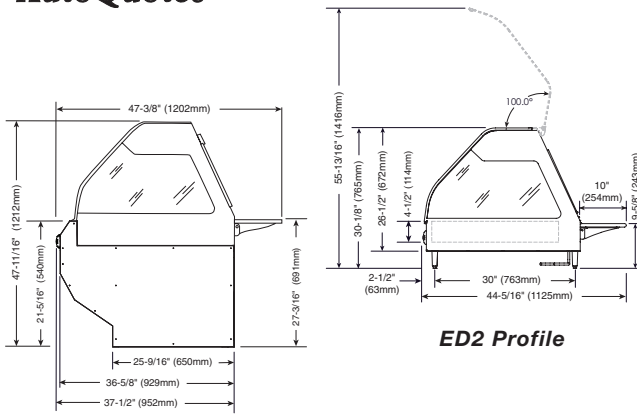

ED2SYS Profile

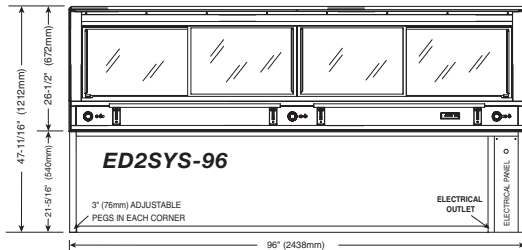

DIMENSIONS (H X W X D)

EXTERIOR, COUNTER-TOP MODEL WITH LEGS:

30-1/8" x 96" x 44-5/16" (765mm x 2438mm x 1125mm)

EXTERIOR, WITH BASE:

47-11/16" x 96" x 47-3/8" (1212mm x 2438mm x 1202mm)

WELL DIMENSIONS (W X L X D):

27-3/16" x 93-5/16" x 4-1/2" (690mm x 2370mm x 114mm)

ELECTRICAL

120/208-240	1	50/60	24.0	5.2	NEMA L14-30P 30A, 250V PLUG
208	1	50/60	24.0	5.2	(PLUG - COUNTER TOP ONLY; TERMINAL BLOCK - SYSTEM)
240	1	50/60	24.0	5.2	
230	1	50/60	24.9	5.7	BARE END, NO PLUG (COUNTER TOP ONLY) (TERMINAL BLOCK - SYSTEM)
380-415	3	50/60	10.7	6.5	
380	3	50/60	9.7	5.2	BARE END, NO PLUG (COUNTER TOP ONLY) (TERMINAL BLOCK - SYSTEM)
415	3	50/60	10.3	6.2	

PAN CONFIGURATION*

PAN SIZE	DIMENSIONS	QTY.
FULL-SIZE & ONE-THIRD**:	12" x 20" x 2-1/2" (GN 1/1)	7
	12" x 6" x 2-1/2" (GN 1/3)	7
HALF-SIZE & ONE-THIRD**:	12" x 10" x 2-1/2" (GN 1/2)	14
	12" x 6" x 2-1/2" (GN 1/3)	7
FULL-SIZE SHEET PANS:	18" x 26" x 1"	4
MAX. CAPACITY/VOLUME:	112 lbs (51 kg) 70 qts (84 L)	

* Pans are not included with display case.

** Will also accept 4" (100mm) deep pans.

SPECIFICATIONS

- Fourteen (14) overhead lights in three (3) light zones.
- Three (3) base heat zones with three (3) adjustable thermostats with a range of 1 through 10, and three (3) heat-on indicator lights.
- Four (4) tinted, reflective, tempered glass sliding doors on operator side.
- Two (2) 10" x 36" (254mm x 914mm) operator-side work shelves.
- Self-serve models 96/PL and 96/PR have a self-serve pan insert 21-5/8" x 26-7/16" x 2" (549mm x 672mm x 51mm) and includes one (1) Wire Pan Grid.

INSTALLATION REQUIREMENTS

Display case must be installed level. The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.

WEIGHT

MODEL	NET	SHIP
ED2-96	526 lb (239 kg)	585 lb (265 kg)
ED2SYS-96	716 lb (325 kg)	796 lb (361 kg)
ED2-96/PL; /PR	535 lb (243 kg)	595 lb (270 kg)
ED2SYS-96/PL; /PR	734 lb (333 kg)	816 lb (370 kg)

CRATED DIMENSIONS (EST.): H X W X D

ED2-96: 45" x 100" x 55" (1143mm x 2540mm x 1397mm)

ED2SYS-96: 65" x 100" x 55" (1651mm x 2540mm x 1397mm)

ACCESSORIES

SEAMLESSLY CONNECT MULTIPLE UNITS		SHEET PAN DIVIDER BAR PACKAGE	
<input type="checkbox"/> BUTTING KIT, COUNTER TOP	5015249	<input type="checkbox"/> FULL-SERVICE	5002805
<input type="checkbox"/> BUTTING KIT, SYSTEM	5008523	<input type="checkbox"/> SELF-SERVICE LEFT-SIDE OR RIGHT-SIDE OF CASES	5002806
<input type="checkbox"/> CARVING STATION	5001874		
PLATFORM SCALE (CUSTOMER SIDE)		<input type="checkbox"/> THERMOSTAT GUARD COVER PLATE (3 PER UNIT)	5007660
<input type="checkbox"/> LEFT-HAND	5001308	<input type="checkbox"/> WORK SHELF WITH GRAVY LANE	5005640
<input type="checkbox"/> RIGHT-HAND	5001307		